

The **BEN LV** luminaire expands with a **new low voltage technology component**. The PG optic with satin diffuser and silk-screened perimeter and the joint at the base make it possible to **rotate and adjust BEN LV to illuminate any environment in a widespread**, simple and effective way.

☑ Features

- Direct emission
- UGR<22
- IP 40

💡 Led

- 3000K/4000K
- >78 lm/W
- CRI>90
- Eye safety: RG0/RGI
- Mac Adams 3
- L80/B10 >50.000h

⌚ Specifications

- 48V DC operation
- SMD LED technology
- PG diffuser for homogeneous emission UGR<22

📦 Body

- Aluminum with epoxy powder coating

🎨 Colors

- White RAL 9003 wrinkled - code W
- Black RAL 9005 wrinkled - code BK

☆ Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

⇄ Related products

- Ben suspended (p. 114)
- Ben recessed (p. 155)
- Ben IP54 (p. 327)

📦 On request

- DALI - code D*
- Bluetooth - code BT*


** Where available*

For SWITCHDIM command use DIMTDS (p. 381)



BEN LV

Impact resistant satin polycarbonate diffuser.



IP 40




Cod. 4000K	Led	lm	Lmm
10PGI2K4LV	12W	931	200x210

Cod. 3000K	Led	lm	Lmm
10PGI2K3LV	12W	879	200x210

TECHNICAL NOTES

BODY ROTATION

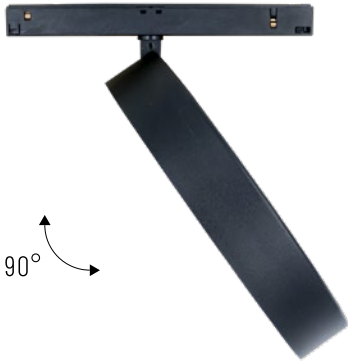

LOW VOLTAGE