

PCM EVO is the **IP66** device that combines **efficiency** and **energy saving** with an **extended life-time**.
High impact resistance and protection against dust and water.

☑ Features

- Direct emission
- UGR<22
- IP 66
- IK10
- -25°→+50°
- 850°

💡 Led

- 4000K
- >140 lm/W
- CRI >80
- Eye safety: RG0/RGI
- Mac Adams 3
- L90/B10 >50.000h

🕒 Specifications

- Built-in driver
- Diffuser made in traslucent PC and reflector made in steel sheet, white (RAL 9003)
- Polyamide +15% fibreglass clips

📦 Body

- Grey PC body (high mechanical resistance, UV stability, RAL 7035)


☆ Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

📄 On request


- DALI - code D
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*
- 3000K - code K3
- 5000K - code K5
- 6500K - code K65
- Steel screen holder clips*
- Built-in sensor*
- Through wiring*

* Where available

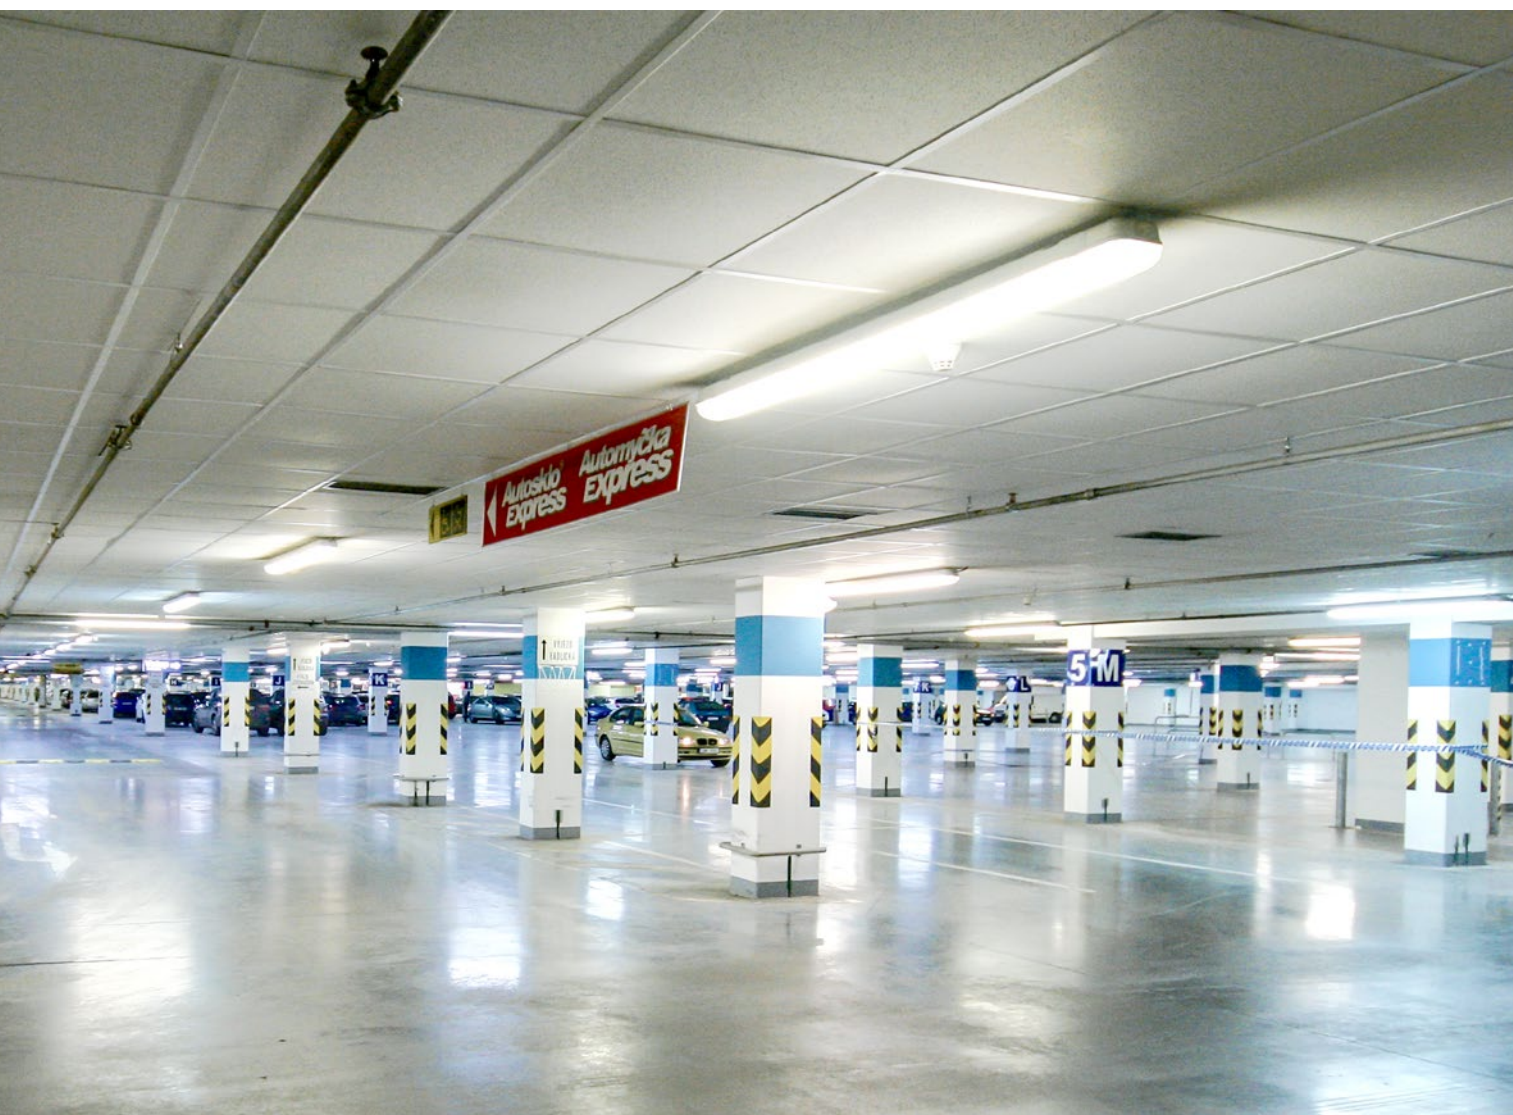

PCM LED EVO _PC

Diffuser made in traslucent PC (high mechanical resistance, UV stability) and reflector made in steel sheet, white (RAL 9003).
Polyamide +15% fibreglass clips.



UGR<22

IP 66 IK10

Cod. 4000K	Led	lm	Lmm
03PC8K466	8W 4000K	1220	610
03PC10K466	10W 4000K	1450	610
03PC13K466	13W 4000K	1990	610
03PC16K466	16W 4000K	2420	1170
03PC19K466	19W 4000K	2880	1170
03PC26K466	26W 4000K	4000	1170
03PC36K466	36W 4000K	5690	1170
03PC47K466	47W 4000K	7490	1170
03PC19K466L	19W 4000K	3010	1450
03PC23K466	23W 4000K	3580	1450
03PC32K466	32W 4000K	4970	1450
03PC44K466	44W 4000K	7240	1450
03PC58K466	58W 4000K	9200	1450

TECHNICAL NOTES

INDOOR/OUTDOOR INSTALLATION

Not suitable for outdoor applications.
To be installed in indoor or covered outdoor areas.

