

WALKABOUT

ID 93

WALKABOUT is the **linear solution** capable of highlighting architectural shapes and textures. Both in the **walk-over version, recessed into the ground, and in the wall or ceiling version**, it has the highest degree of protection (**IP 67**) while the special optics concentrate the luminous flux in a **narrow beam**, even in the **asymmetric version**. The possibility of connecting different length modules of WALKABOUT allows to **create continuous light lines, both on the ground and on the façade**, adapting to different architectural solutions in the outdoor environment.

☑ Features

- Direct emission
- IP 67
- 1K 07/1K 09
- 10 kN

💡 Led

- 3000K
- >100lm/W
- CRI >80
- Eye safety: RGO
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- Remote driver
- Back-screenprinted transparent cover glass
- PMMA optics:
 - Narrow Beam - code NB
 - Wide Beam - code WB
 - Asymmetrical - code AS
 - Double asymmetric - code DAS

📦 Body

- Anodized aluminum

🎨 Colors

- Grey RAL 7035

★ Certifications

- CE Conformity
- Energy efficiency F
- 5 years warranty

📦 On request

- DALI - code D*
- 4000K - code K4*
- RGB*/RGBW*


* Where available





WALKABOUT

For single installation, with adjustable support.



IP 67 IK07

NARROW BEAM OPTICS - NB

Cod. 3000K	Led	lm	mm
93NB6K3	5.5W	681	276
93NB11K3	11W	1362	526
93NB22K3	22W	2724	1026
93NB33K3	33W	4087	1526

WIDE BEAM OPTICS - WB

Cod. 3000K	Led	lm	mm
93WB6K3	5.5W	697	276
93WB11K3	11W	1394	526
93WB22K3	22W	2788	1026
93WB33K3	33W	4182	1526

ASYMMETRIC OPTICS - AS


Cod. 3000K	Led	lm	mm
93AS6K3	5.5W	705	276
93AS11K3	11W	1410	526
93AS22K3	22W	2820	1026
93AS33K3	33W	4229	1526

DOUBLE ASYMMETRIC OPTIC - DAS

Cod. 3000K	Led	lm	mm
93DAS6K3	5.5W	689	276
93DAS11K3	11W	1378	526
93DAS22K3	22W	2756	1026
93DAS33K3	33W	4134	1526

WALKABOUTFC

For continuous row installation* with adjustable support.



IP 67 IK07

*Provide an element for single installation, with relative overall dimensions, at the end of the continuous row.

NARROW BEAM OPTICS - NB

Cod. 3000K	Led	lm	mm
93NB6K3FC	5.5W	681	276
93NB11K3FC	11W	1362	526
93NB22K3FC	22W	2724	1026
93NB33K3FC	33W	4087	1526

WIDE BEAM OPTICS - WB

Cod. 3000K	Led	lm	mm
93WB6K3FC	5.5W	697	276
93WB11K3FC	11W	1394	526
93WB22K3FC	22W	2788	1026
93WB33K3FC	33W	4182	1526

ASYMMETRIC OPTICS - AS

Cod. 3000K	Led	lm	mm
93AS6K3FC	5.5W	705	276
93AS11K3FC	11W	1410	526
93AS22K3FC	22W	2820	1026
93AS33K3FC	33W	4229	1526


DOUBLE ASYMMETRIC OPTIC - DAS

Cod. 3000K	Led	lm	mm
93DAS6K3FC	5.5W	689	276
93DAS11K3FC	11W	1378	526
93DAS22K3FC	22W	2756	1026
93DAS33K3FC	33W	4134	1526

WALKABOUT___GROUND

For single walk-over installation.

Recessed box included.

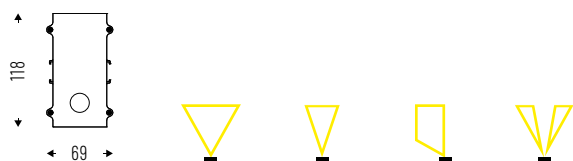

IP 67 IK09

NARROW BEAM OPTICS - NB

Cod. 3000K	Led	lm	mm
93NB6K3G	5.5W	681	287
93NB11K3G	11W	1362	537
93NB22K3G	22W	2724	1037
93NB33K3G	33W	4087	1537

WIDE BEAM OPTICS - WB

Cod. 3000K	Led	lm	mm
93WB6K3G	5.5W	697	287
93WB11K3G	11W	1394	537
93WB22K3G	22W	2788	1037
93WB33K3G	33W	4182	1537

ASYMMETRIC OPTICS - AS

Cod. 3000K	Led	lm	mm
93AS6K3G	5.5W	705	287
93AS11K3G	11W	1410	537
93AS22K3G	22W	2820	1037
93AS33K3G	33W	4229	1537


DOUBLE ASYMMETRIC OPTIC - DAS

Cod. 3000K	Led	lm	mm
93DAS6K3G	5.5W	689	287
93DAS11K3G	11W	1378	537
93DAS22K3G	22W	2756	1037
93DAS33K3G	33W	4134	1537

WALKABOUT___GROUND FC

For continuous row walk-over installation*.

Recessed box included.

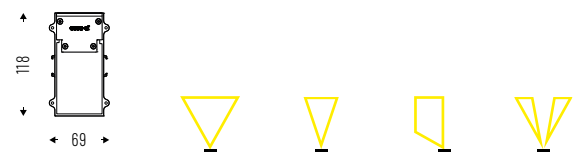

**Provide an element for single installation, with relative overall dimensions, at the end of the continuous row.*

IP 67 IK09

NARROW BEAM OPTICS - NB

Cod. 3000K	Led	lm	mm
93NB6K3GFC	5.5W	681	278
93NB11K3GFC	11W	1362	528
93NB22K3GFC	22W	2724	1028
93NB33K3GFC	33W	4087	1528

WIDE BEAM OPTICS - WB

Cod. 3000K	Led	lm	mm
93WB6K3GFC	5.5W	697	278
93WB11K3GFC	11W	1394	528
93WB22K3GFC	22W	2788	1028
93WB33K3GFC	33W	4182	1528

ASYMMETRIC OPTICS - AS

Cod. 3000K	Led	lm	mm
93AS6ASK3GFC	5.5W	705	278
93AS11ASK3GFC	11W	1410	528
93AS22ASK3GFC	22W	2820	1028
93AS33ASK3GFC	33W	4229	1528

DOUBLE ASYMMETRIC OPTIC - DAS

Cod. 3000K	Led	lm	mm
93DAS6K3GFC	5.5W	689	278
93DAS11K3GFC	11W	1378	528
93DAS22K3GFC	22W	2756	1028
93DAS33K3GFC	33W	4134	1528

ACCESSORIES

			
Driver ON/OFF IP 67.	Junction kit for walk-over recessed box.	Removal kit for Walkabout Ground/FC.	Plates kit for driver mounting on Walkabout/FC bar.
93LC13241567 93LC35241567 93LC75241567 93LC100241567	93AA11CC	93AATLCC	93AABD

TECHNICAL NOTES

GROUND INSTALLATION WITH WALKABLE OUTER CASING
FOR WALKABOUT GROUND AND WALKABOUT GROUND FC MODEL

